


SW225 HEAVY DUTY D.C. CONTACTORS FOR POWER DISTRIBUTION CENTRES

Albright International introduces a new addition for use within the Telecommunications market: **The SW225**

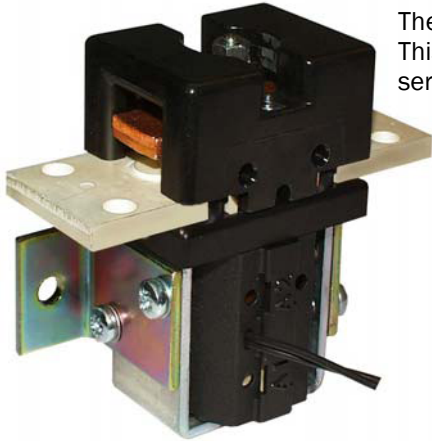


The SW225 has been specifically designed to mount within the confines of a 1U rack. This busmountable compact contactor follows the recognised design of the SW250 series of contactors.

- “L” Shape Mounting bracket kits are fitted as a standard option.
- To suit the limitations of space of a 1U rack, the coil connections are supplied as flying leads (up to 125mm).

In addition, the Magnetic Latching option is available for this series which enables the contacts to remain closed whilst consuming no coil power.
(See separate brochure —“Power Consumption Reduction for Albright Contactors”).

**These contactor variants are an innovative & unique introduction
from the World’s leading manufacturer of DC Contactors.**

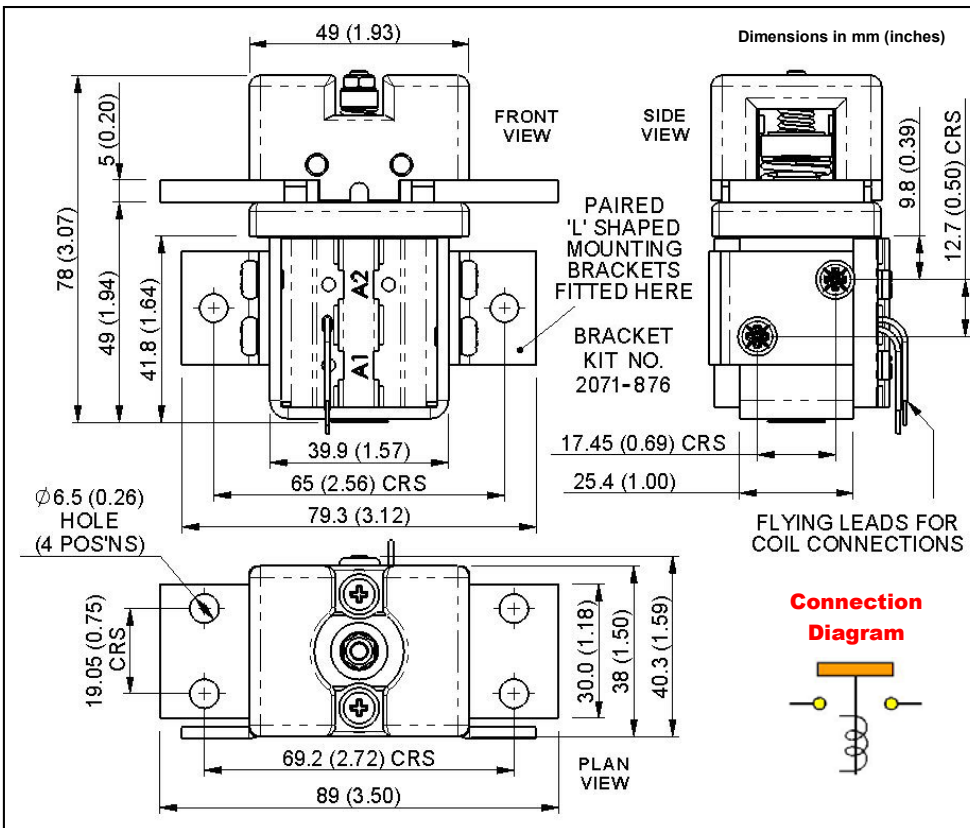

PERFORMANCE DATA

Thermal current Rating (100%):	Up to 225 Ampere
Typical Fault Currents that can be ruptured (Resistive Load):	330 Amperes at 60V D.C.
Maximum Recommended Contact Voltages:	60V D.C.
Typical Voltage Drop across New Contacts When new at maximum rated load:	50mV
Mechanical Life:	>1,000,000
Coil Power Dissipation: Continuously Rated Types:	7 - 13 Watts
Maximum Pull-in Voltage (Coil at 20°C): Continuously Rated Type:	66%V
Typical Drop-out Voltage:	10-30%V
Typical Pull-in time (contacts to close):	15ms
Typical Drop-out time (contacts to Open): Without Suppression:	6ms
Typical Contact Bounce Period:	<5ms
Busbar Size: The minimum copper busbar size for the maximum continuous current rating is:	30mm x 5mm (1.26 x 0.20 Inches)

The thermal current ratings stated for the contactors are dependant upon the size of busbar being used for the required duty. For maximum continuous ratings, the busbars should not be less than the sizes stated above.

Please Note: All performance data provided should be used as a guide only. Some de-rating or variation from these figures may be necessary according to type and application.



Global Industrial Products
3338 West Lake, Glenview, IL
Web Site: www.globalepower.com



Tel: 847-901-4040
Fax: 847-901-4036
E-mail: sales@globalepower.com
Toll-Free 800-951-8774