


CURTIS PMC MODELS	VOLTAGE (volts)	CURRENT (amps)	2 MIN RATING (amps)	5 MIN RATING (amps)	1 HOUR RATING (amps)	VOLTAGE DROP @ 100A	UNDERVOLT CUTBACK (volts)
1204-0xx	24-36	275	275	200	125	.35	16
1204-1xx	24-36	175	175	130	75	.50	16
1204-2xx	24-36	275	275	200	125	.35	16
1204-3xx	24-36	175	175	130	75	.50	16
1204-4xx	36-48	275	275	200	125	.35	21
1204-5xx	36-48	175	175	130	75	.50	21
1204-6xx	12	275	275	200	125	.35	9
1204-7xx	12	175	175	130	75	.50	9
1205-1xx	24-36	400	400	275	175	.25	16
1205-2xx	36-48	350	350	250	150	.30	21
1205-3xx	12	400	400	275	175	.25	9

Dimensions: mm (inches)



Typical Wiring Diagram:

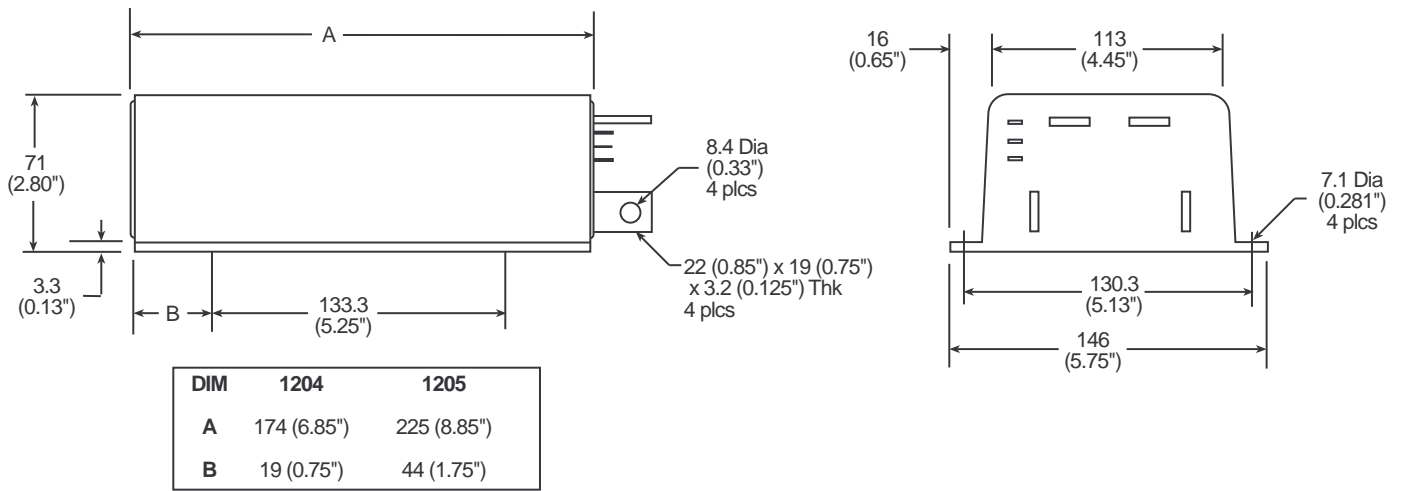