




CURTIS PMC MODELS	VOLTAGE INPUT (volts)	CURRENT LIMIT (amps)	2 MIN RATING (amps)	5 MIN RATING (amps)	1 HOUR RATING (amps)	VOLTAGE DROP @ 100A	UNDERVOLT CUTBACK (volts)
1204X -12xx	12	275	275	200	125	.35V	9
-14xx	12	400*	300	210	135	.25V	9
-42xx	24-36	275	275	200	125	.35V	16
-44xx	24-36	400*	300	210	135	.25V	16
-52xx	36-48	275	275	200	125	.35V	21
1205X -14xx	12	400	400	275	175	.25V	9
-16xx	12	500*	425	285	185	.20V	9
-44xx	24-36	400	400	275	175	.25V	16
-46xx	24-36	500*	425	285	185	.20V	16
-53xx	36-48	350	350	250	150	.35V	21

\* 30 second rating

### Dimensions: mm (inches)

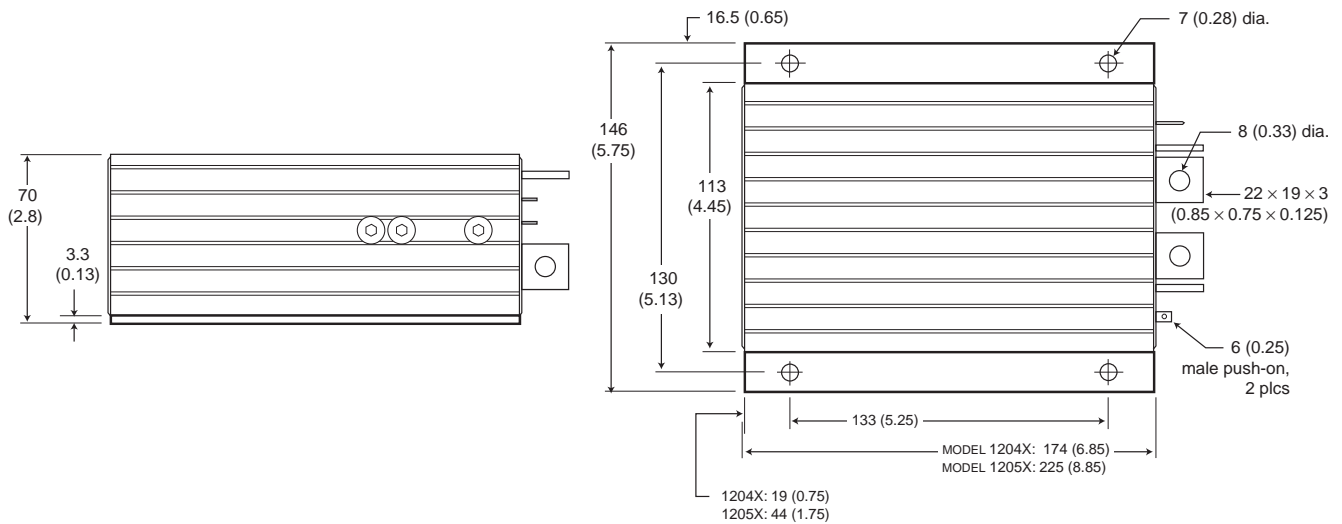

### Typical Wiring Diagram:

