


Specifications

CURTIS PMC MODELS	VOLTAGE (volts)	1 MIN RATING (amps)	5 MIN RATING (amps)	1 HOUR RATING (amps)	TYP. VOLTAGE DROP @ 100A (volts)	UNDERVOLTAGE CUTBACK (volts)	AMBIENT TEMP. RANGE (C°)
1207-11XX	24-36	250	150	100	0.35	16	-25 to 50
1207-21XX	24-36	300	170	110	0.30	16	-25 to 50

Dimensions: mm (inches)

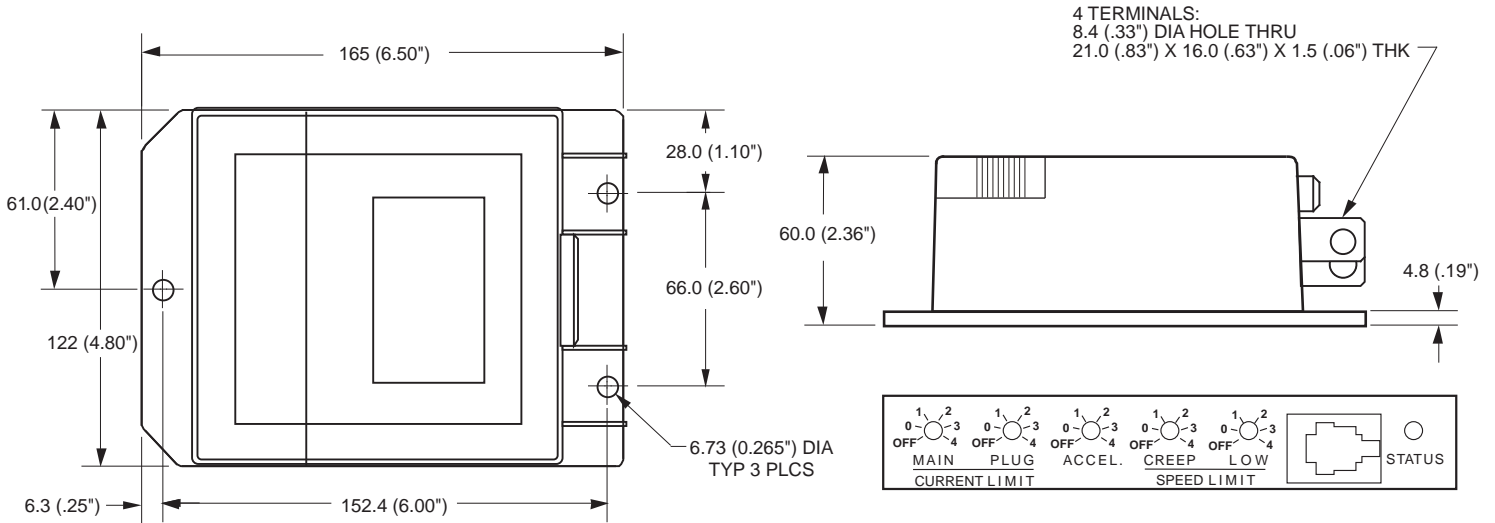

Potentiometer adjustment and Programmer connection access

Typical Wiring Diagram

