


CURTIS PMC MODELS	VOLTAGE (volts)	CURRENT (amps)	2 MIN RATING (amps)	5 MIN RATING (amps)	1 HOUR RATING (amps)	VOLTAGE DROP @ 100A	UNDERVOLT CUTBACK (volts)
1209B-46xx	24-36	500	500	350	225	<0.15V	16
1209B-55xx	36-48	450	450	300	200	<0.30V	21
1209B-64xx	48-72	400	400	275	175	<0.30V	30
1209B-6A5xx	48-80	450	450	300	200	<0.25V	33
1209B-72xx	72-120	275	275	175	100	<0.70V	45
1221B-48xx	24-36	600	600	425	250	<0.10V	16
1221B-57xx	36-48	550	550	375	225	<0.25V	21
1221B-66xx	48-72	500	500	350	200	<0.25V	30
1221B-6A7xx	48-80	550	550	375	225	<0.20V	33

Dimensions: mm (inches)



Typical Wiring Diagram:

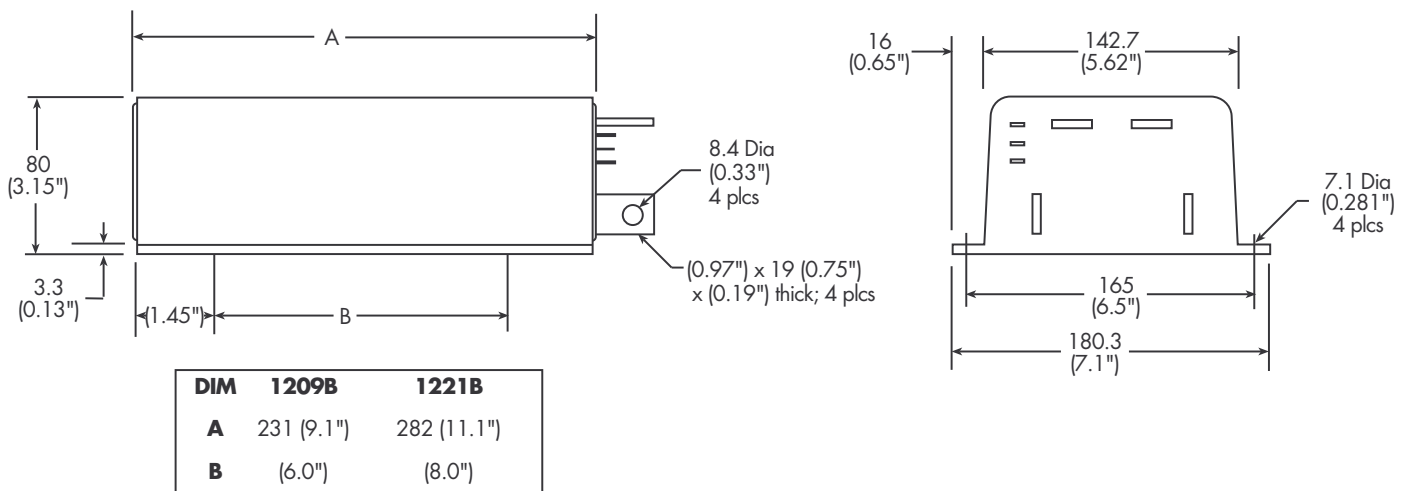